

821

Automatic fastener



Video
presentation

Lockable fastener for hinged doors:

↳ **Overlapping doors**

7 references, from 52 to 191 mm door thickness

45 mm shim required for installation (supplied as an extra)

↳ **Semi-inset or inset doors**

9 references, from 57 to 236 mm door thickness

Please consult us for other thicknesses

Operating temperature: $-30^{\circ}\text{C}^{(1)}$ to $+70^{\circ}\text{C}$

⁽¹⁾ For temperature below -30°C , please contact us



Patented
Registered
design





« Hands-free »
opening with elbow



Adjustable bolt for greater
installation tolerance


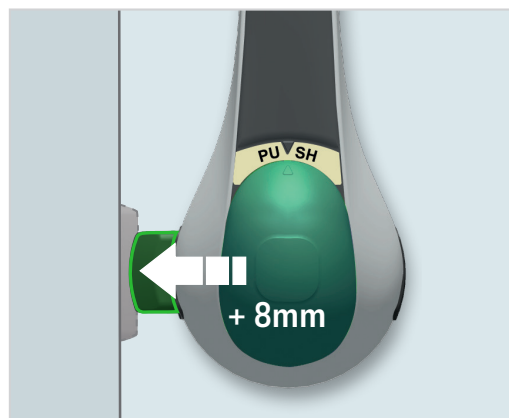
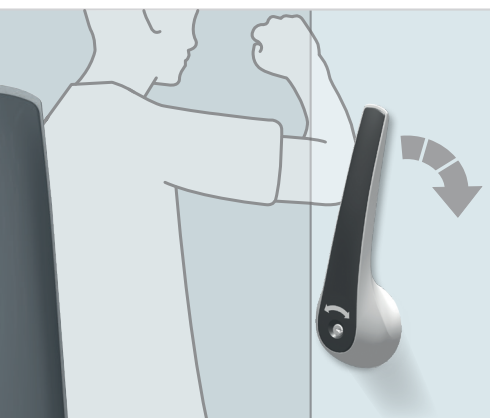


Internal release by push button
or lever operation

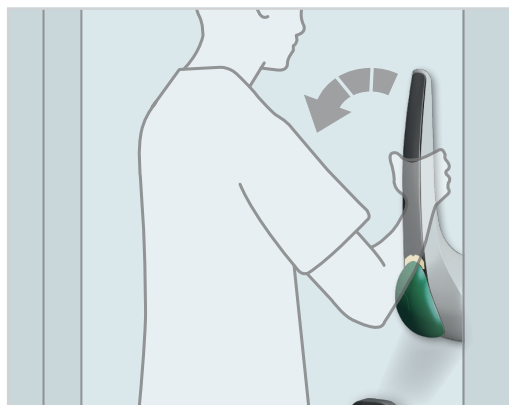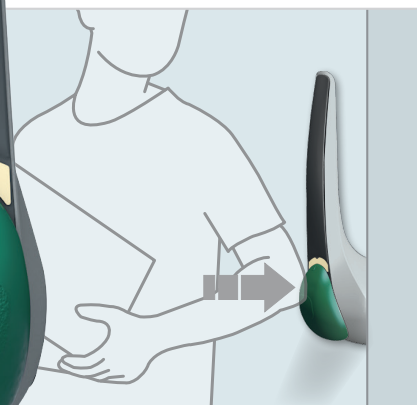

A single strike⁽²⁾ regardless
of door thickness or type

Reference	821
Weight	2200 g
Number of screws	16
Screw diameter	6 mm

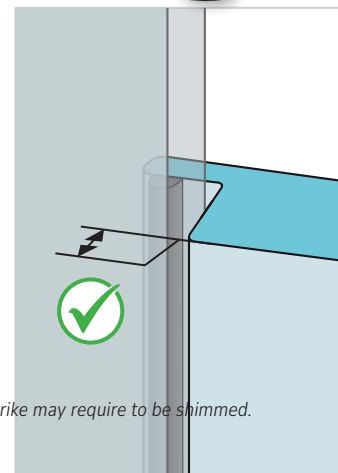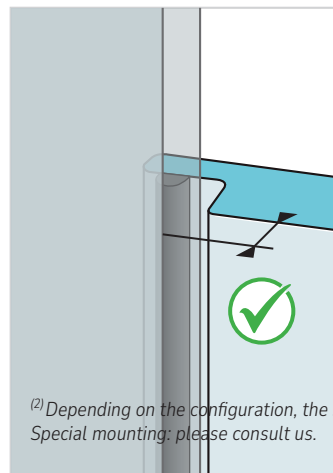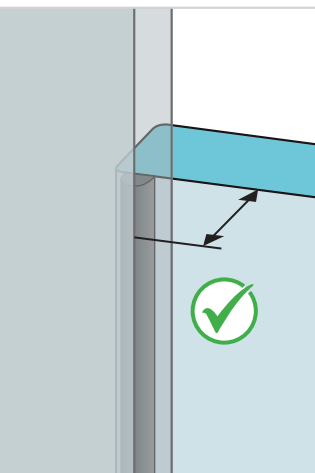

⁽²⁾ Depending on the configuration, the strike may require to be shimmed.
Special mounting: please consult us.


FEATURES:

- » To be specified: left or right hand door
Quick and easy reversal if required
- » Hygienic: fluid design with no retention zone
- » Secure fastener: invisible and inaccessible mechanism and fixings
- » High corrosion resistance (HP)⁽¹⁾
- » Fasteners assembly accepts door thickness tolerances to ensure smooth, optimum operation at all times
- » Adjustable strike: laterally with vertical positioning tolerance
- » Custom colors: please contact us


⁽¹⁾ Standard European half-cylinder




Offset shim

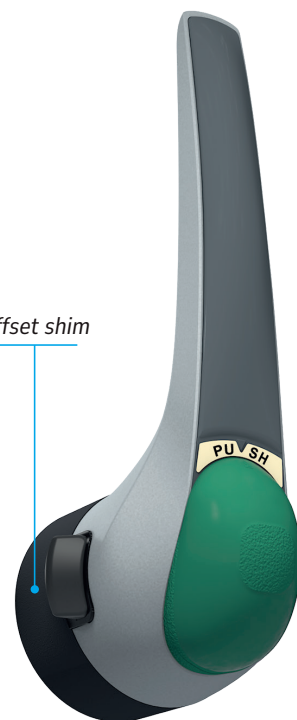


External fastener

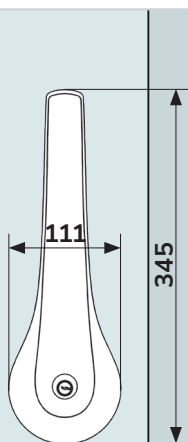


Internal fastener

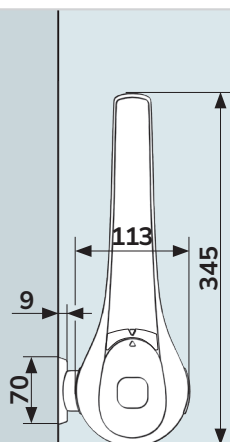

Semi-inset door

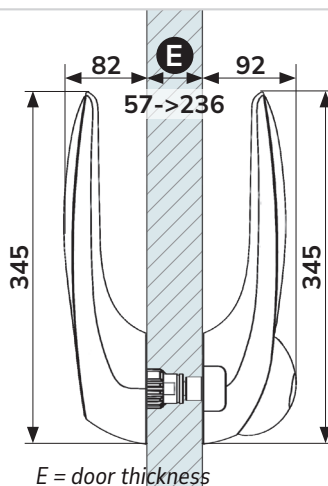

Overlapping door

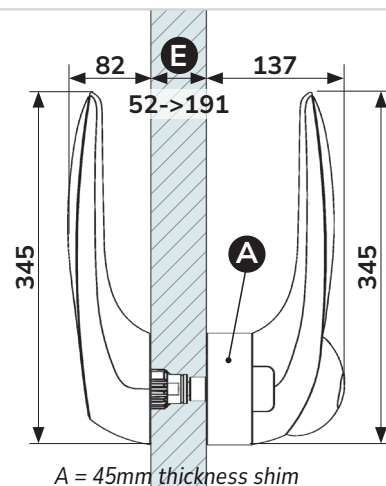

Overlapping door - 7 references

	00821100 ⁽²⁾ + shim A	00821120 ⁽²⁾ + shim A	00821140 ⁽²⁾ + shim A	00821160 ⁽²⁾ + shim A	00821180 ⁽²⁾ + shim A	00821200 ⁽²⁾ + shim A	00821220 ⁽²⁾ + shim A
E mini	52	72	92	112	132	152	172
E maxi	71	91	111	131	151	171	191

Semi-inset door - 9 references

	00821060 ⁽²⁾	00821080 ⁽²⁾	00821100 ⁽²⁾	00821120 ⁽²⁾	00821140 ⁽²⁾	00821160 ⁽²⁾	00821180 ⁽²⁾	00821200 ⁽²⁾	00821220 ⁽²⁾
E mini	57	77	97	117	137	157	177	197	217
E maxi	76	96	116	136	156	176	196	216	236

⁽²⁾ Left (ex : 00821120G) or right (ex : 00821120D) hand door to be specified



FERMOD
INNOVATION since 1934



3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE
TEL. : +33 (0)3 44 53 12 86 - FAX : +33 (0)3 44 53 62 03
www.fermod.com - MAIL : contact@fermod.com
Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €
RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z

10/2024