FERMOD® INNOVATION since 1934

3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE
TEL. : +33 (0)3 44 53 12 86 - FAX : +33 (0)3 44 53 62 03
www.fermod.com - MAIL : export@fermod.com

10/2024

FERMATIC RANGE SELECTION GUIDE

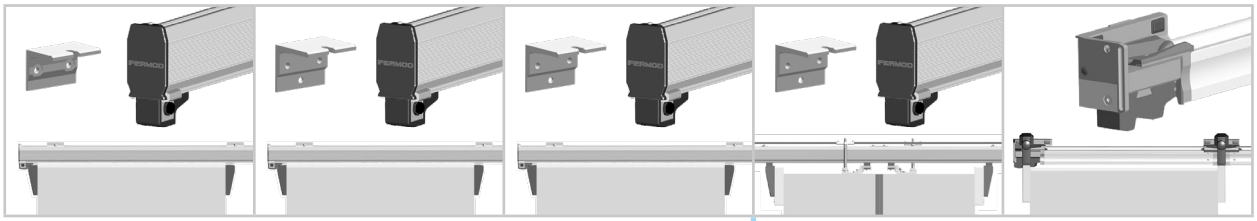

	2120	2130	2150	2130DV[1]	8730
Material	Aluminium	Aluminium	Aluminium	Aluminium	Stainless Steel
Weight capacity	60 Kg	80 Kg	120 Kg	80Kg/leaf	120 Kg
Door thickness	40 -> 140 mm	50 -> 160 mm	50 -> 160 mm	50 -> 140 mm	60 -> 180 mm
Door width	900 -> 2600 mm	900 -> 2600 mm	900 -> 2600 mm	890 -> 2590 mm/leaf	1100 -> 2600 mm
Maximum height *(Depending on door width)*	2200 -> 2900 mm	2200 -> 2900 mm	2200 -> 2900 mm	2450 mm	4500 mm
Floor gasket	250	250	3350	250	3350
Fixing strip	3362	3362	3362	3362	3362
Frame gasket	2311	8511	8511	8511 + 2920DV	8511
Fixing strip	3312	3312	3312	3312 + 2962	3312
Angle fixing strip	2313	2313	2313	2313	2313
Wall guide	Option *(minimum 75 mm door thickness)*	Option	Option	Option	Option
Manual lock	55 - 55HP	57 - 57HP	57 - 57HP	137	57 - 57HP
Automatic lock	56 - 56HP	58 - 58HP	58 - 58HP		58 - 58HP
Automatic Kit	5000/5010	5000/5010	5000/5010	5000-DV	5800

[1] Please revert to us for systems 3530DV & 2920DV

FERMOD® INNOVATION since 1934
3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE
TEL. : +33 (0)3 44 53 12 86 - FAX : +33 (0)3 44 53 62 03
www.fermod.com - MAIL : export@fermod.com

FERMATIC RANGE SELECTION GUIDE







	3530	7530	3530-300Kg	7530-300Kg	3530-400Kg	2920
Material	Electrolytic zinc finish steel	Stainless Steel	Electrolytic zinc finish steel	Stainless Steel	Electrolytic zinc finish steel	Aluminium
Weight capacity	200 Kg	200 Kg	300 Kg	300 Kg	400 Kg	130/180/250 Kg
Door thickness	80 -> 180 mm	80 -> 180 mm	80 -> 180 mm	80 -> 180 mm	100 -> 180 mm	40 -> 60 mm
Door width	840 -> 3240 mm	840 -> 3240 mm	840 -> 3240 mm	840 -> 3240 mm	2040 -> 5640 mm	900 -> 2600 mm
Maximum height *(Depending on door width)*	4500 mm	4500 mm	4500 mm	4500 mm	7000 mm	2400-2700 mm
Floor gasket	3350	3350	3350	3350	3350	2950
Fixing strip	3362	3362	3362	3362	3362	Bottom rail
Frame gasket	8511	8511	8511	8511	8511	2911
Fixing strip	3312	3312	3312	3312	3312	3312
Angle fixing strip	2313	2313	2313	2313	2313	2313
Wall guide	Option	Option				
Manual lock	57	57HP	37	37	37	Lock 2920
Automatic lock	58	58HP	38	38	38	
Automatic Kit	5000/5010	5000/5010	5000-300Kg	5000-300Kg	5400	2990

FERMOD® INNOVATION since 1934
3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE
TEL. : +33 (0)3 44 53 12 86 - FAX : +33 (0)3 44 53 62 03
www.fermod.com - MAIL : export@fermod.com

FERMATIC RANGE SELECTION GUIDE

⚠ For positive temperature only

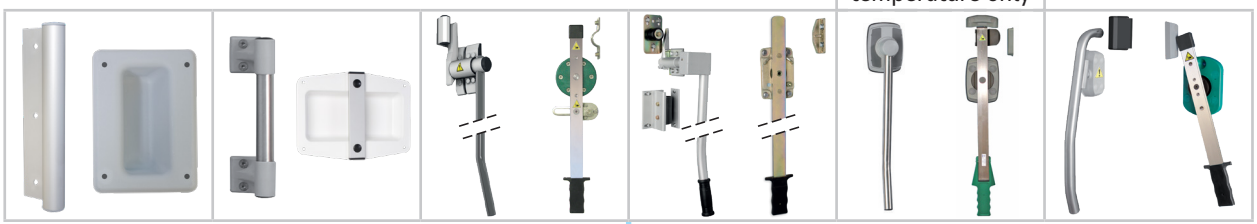

Handles / Manual systems	2320 external 2320 internal	2420 external 8520 internal	3530/7530 external 7530 internal	4400 external 4400 internal	6200 external 6200 internal	8730 external 8530 internal
2120	(Included)	X				X
2130	(Included)	X				X
2150		⚠ Door weight max. 90 Kg	X		X	X
2130DV	X	X				
8730		⚠ Door weight max. 90 Kg	X		X	X
3530			X		X	⚠ Door weight max. 120 Kg
7530			X		X	⚠ Door weight max. 120 Kg
3530-300Kg			Longer level handle 7530 (door thickness 80 -> 225 mm)			
7530-300Kg			Longer level handle 7530 (door thickness 80 -> 225 mm)			
3530-400Kg				X		
2920		Door weight max. 90 Kg				8730 ⚠ Door weight max. 120 Kg ⚠ Door thickness mini 50 mm